
TECHNICAL INFORMATION

Skintact® Electrosurgical Neutral Electrodes

Skintact® Electrosurgical Neutral Electrode — RSW23A30

Code: 50907

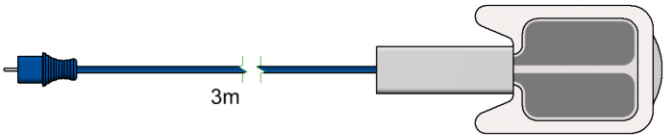

PRODUCT

Characteristics	disposable, self adhesive, non-sterile
Type	split
Shelf Life	36 Mon
Storing Conditions (min./max.)	+5°C (41°F) / +30°C (86°F)
Patient Target group	Neonatal (0.45 - 4.99 kg / 1 - 11 lbs)
Cable length [m]	3
Connector	REM

CLASSIFICATION AND STANDARDS

Classification (REG(EU) 2017/745, Annex VIII)	Class IIb

BIOCOMPATIBILITY

ISO 10993-1 ff	pass

PERFORMANCE

IEC 60601-2-2	pass

MATERIALS

Carrier Material	Non woven Medical Tape
Adhesive	Polyacrylate
Conductive Layer	Aluminium
Gel	Hydrogel
Protective Cover	Siliconized Foil

DIMENSIONS

Electrode Size L/W [cm] (approx.)	17 / 8
Adhesive Area [cm²] (approx.)	86
Conductive Area [cm²] (approx.)	43
Gel Thickness [mm]	0.5 ± 0.05

STANDARD PACKAGING

Pieces / Pouch	1
Pieces / Box	10
Pieces / Case	40
Duplex Label on Pouch	yes
Lot number and expiration date on every pouch, box and case.	

DIMENSIONS PACKAGING

Pouch (L/W) [mm]	260 x 196
Box (L/W/H) [mm]	282 / 185 / 141
Case (L/W/H) [mm]	398 / 298 / 304

MATERIAL PACKAGING

Pouch	Paper / Aluminium / PE
Box	Cardboard
Case (L/W/H) [mm]	Cardboard

ENVIRONMENTAL INFORMATION

Compliance with RoHS Directive	yes
Compliance with REACH Regulation	yes
Not made with natural rubber latex.	

POWER & CURRENT INFORMATION

Determine Watt maximum for each mode of operation as stipulated in IFU of ESU device manufacturer (maximum current at 350 mA)

Made in Austria by:

Leonhard Lang GmbH
Archenweg 56, 6020 Innsbruck, Austria
Tel. +43 512 33 4 25, Fax 39 22 10
Medical@LeonhardLang.at
www.LeonhardLang.com