
Skintact®

TECHNICAL INFORMATION
Skintact® Electrosurgical Neutral Electrodes

Skintact® Electrosurgical Neutral Electrode RS26A30
Code: 59738

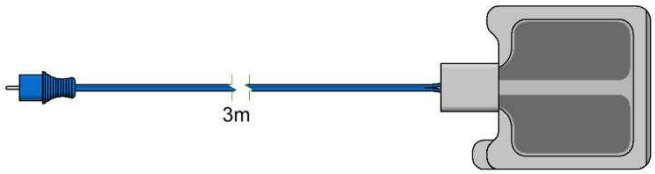

PRODUCT

Characteristics	disposabel, self adhesive, non-sterile
Type	split
Shelf Life	36 Mon
Storing Conditions (min./max.)	+5°C (41°F) / +30°C (86°F)
Patient Target group	Pediatric (5 - 15 kg / 11 - 33 lbs)
Cable length [m]	3
Connector	REM

CLASSIFICATION AND STANDARDS

Classification (REG(EU) 2017/745, Annex VIII)	Class IIb
Classification (21 CFR 878.4400)	Class II
CMDR SOR/98-282	Class II

BIOCOMPATIBILITY

ISO 10993-1 ff	pass

PERFORMANCE

IEC 60601-2-2	pass

MATERIALS

Carrier Material	Foam
Adhesive	Polyacrylate
Conductive Layer	Aluminium
Gel	Hydrogel
Protective Cover	Siliconized Foil

DIMENSIONS

Electrode Size L/W [cm] (approx.)	13 / 11
Adhesive Area [cm²] (approx.)	118
Conductive Area [cm²] (approx.)	66
Gel Thickness [mm]	0.5 ± 0.05

STANDARD PACKAGING

Pieces / Pouch	1
Pieces / Box	50
Duplex Label on Pouch	yes
Lot number and expiration date on every pouch and box.	

DIMENSIONS PACKAGING

Pouch (L/W) [mm]	210 / 196.5
Box (L/W/H) [mm]	385 / 285 / 160

MATERIAL PACKAGING

Pouch	Paper / Aluminium / PE
Box	Cardboard

ENVIRONMENTAL INFORMATION

Compliance with RoHS Directive	yes
Compliance with REACH Regulation	yes
Not made with natural rubber latex.	

POWER & CURRENT INFORMATION

Maximum 120 W

Made in Austria by:

Leonhard Lang GmbH
Archenweg 56, 6020 Innsbruck, Austria
Tel. +43 512 33 4 25, Fax 39 22 10
Medical@LeonhardLang.at
www.LeonhardLang.com